



RHEEM ELECTRIC STORAGE WATER HEATERS



ELECTRIC

25L
- 400L

DELIVERY

7 or 10
YEAR

CYLINDER
WARRANTY^{1,2}

Indoor/
Outdoor¹

INSTALLATION



DUAL
HANDED³



FEATURES

- Fast, easy like-for-like replacement
- Feature dual handed inlet and outlet fittings
- 25L, 50L, 80L and 125L models provide T&PR fittings on both sides of the tank for even easier installation
- Reliable vitreous enamel lining
- Small diameter – 400mm (25L & 50L), 480mm (80L & 125L)
- Twin Element models provide that little bit extra when you need it (160L - 400L)
- Models with a capacity of 125L or more suit connection to concessional (off peak) tariffs
- 10 year cylinder warranty¹, including 3 years labour on cylinder on 250L to 400L models
- 7 year cylinder warranty², including 3 years labour on cylinder on 25L to 160L models

WHY CHOOSE RHEEM

- Backed by over 70 years of Rheem water heating experience
- Capacities to suit every family size and hot water requirement
- Mains pressure water delivery for water that comes on steady, hot and strong!
- Full technical support through Rheem's National Service Network





RHEEM ELECTRIC STORAGE WATER HEATERS


MODEL		25L	50L	80L	125L	160L	250L	315L	400L
Rheem Single Element		191025 191025/P†	191050 191050/P†	191080	191125	191160	491250	491315	491400
Rheem Twin Element						192160 ³	492250 ⁴	492315 ⁴	492400 ⁴
Hot Water Delivery	Litres	25	50	80	125	160	250	315	400
Boost Capacity (twin element models)	Litres	–	–	–	–	45	50	50	90
kW Rating	1.8	–	✓	✓	✓	✓	✓	–	–
	2.4	✓	✓	–	–	✓	–	–	–
	3.6	✓	✓	✓	✓	✓	✓	✓	✓
	4.8	–	–	–	–	–	✓	✓	✓
Relief Valve Setting	kPa	1400	1400	1400	1400	1400	1000	1000	1000
Expansion Control Valve (kPa)	kPa	1200	1200	1200	1200	1200	850	850	850
Max Water Supply Pressure:									
with ECV (kPa)	kPa	960	960	960	960	960	680	680	680
without ECV (kPa)	kPa	1120	1120	1120	1120	1120	800	800	800
Water Connections		RP ³ / ₄	RP ³ / ₄	RP ³ / ₄	RP ³ / ₄	RP ³ / ₄	RP ³ / ₄	RP ³ / ₄	RP ³ / ₄
Dimensions									
A	mm	430	695	945	1340	1610	1395	1640	1840
B	mm	400	400	480	480	480	640	640	690
C	mm	436	436	515	515	515	680	680	730
D	mm	106	397	702	1102	1332	1117	1317	1479
E	mm	142	142	64	64	104	73	113	121
F	mm	60	60	66	66	66	103	103	105
G - Twin element models	mm	–	–	–	–	1081	988	1228	1323
H	degrees	26	26	24	24	23	32	32	30
J	degrees	64	59	60	60	58	88	88	83
M	degrees	–	–	–	–	58	92	92	97
Approx. Weight (Empty)	kg	19	26	36	49	55	76	97	118

Accessories

Wall Mounting Bracket


Part No: 299120 (25L - 80L model only)

Rheem 25L-125L

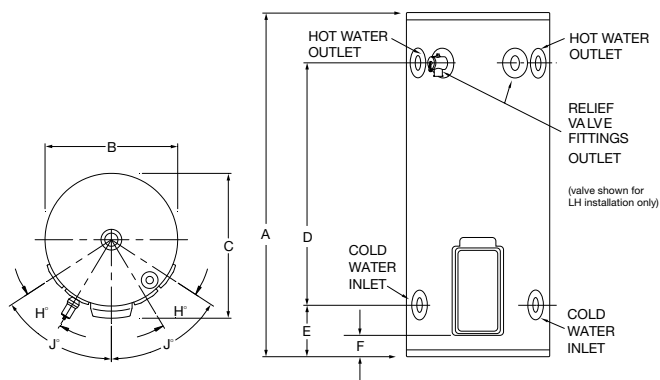

† Plug and lead model available in 2.4kW Rating only, suitable for indoor installation only

Rheem 160L - 400L

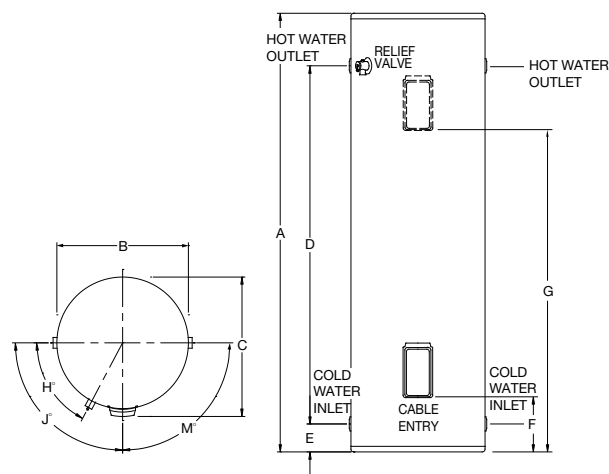

Note: 160L - 400L models feature a single T&PR valve, located on the left side

¹ Warranty: (250L - 400L) 10 Years on Cylinder, 3 Years Labour on Cylinder, 1 Year Parts & Labour warranty on all other components for Domestic (non-Commercial) installations. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at www.rheem.com.au/warranty

² Warranty: (25L - 160L) 7 Years on Cylinder, 3 Years Labour on Cylinder, 1 Year Parts & Labour warranty on all other components for Domestic (non-Commercial) installations. 7 year warranty applies to product manufactured after 1/1/2012. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at www.rheem.com.au/warranty

³ Available in 3.6/3.0 element rating only

⁴ Available in 3.6 & 4.8 element rating only

® Registered Trademark of Rheem Australia Pty Ltd. Materials and data are subject to change without notice.

Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia
PO Box 7508 Silverwater NSW 2128, Australia.

www.rheem.com.au

